SUSPENSION PIN/BUSHING ASSEMBLY

Features

- Rugged crimped construction
- High load capacity
- Tight tolerance
- High compression elastomer

Benefit<u>s</u>

- Eliminates need for lubrication
- Extra long service life
- Withstands high impact shock and
 +/- 7° torsional rotation
- Provides vibration, shock and noise attenuation

Load Range

• 2,000 lbs. to 4,500 lbs. per pin

Significantly extends service life of suspension components in vehicular applications.



Barry Suspension Pin/Bushing Assembly is designed and constructed for maintenance free and consistent service life. These superior parts will outlast the predicted life of modern heavy-duty leaf spring suspension in vehicular applications.

Applications

 Medium & Heavy-Duty Truck/ Tractor Front & Rear Suspension Assemblies

RESILIENT ELEMENT	Natural Rubber
STANDARD MATERIALS	High Strength Steel
WEIGHT	2.5 lbs.


Environmental Data


 Natural Rubber elastomer has an operating temperature range of -25°F to +160°F (-30°C to +70°C)



Suspension Pin/Bushing Assembly

Dimensions & Performance Characteristics

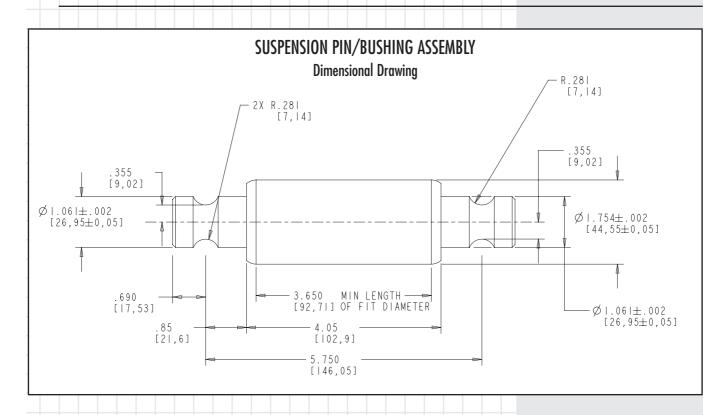

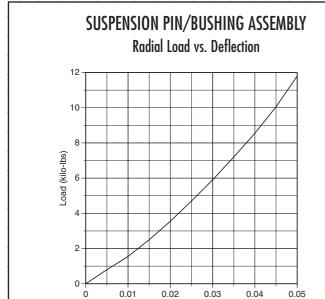





Deflection (in)

THE STEADY FORCE IN SHOCK & VIBRATION ISOLATION

Barry Controls

40 Guest Street • Brighton, MA 02135-9105 • (617) 787-1555 • Fax (617) 787-7807

Dimensions and data are subject to change without notice.

For technical, design, or application assistance, call toll free:

1-800-BARRY MA